

INOSURE® PUSH-IN WIRE CONNECTORS

**EASILY
ACCEPTS**
STRANDED
OR SOLID
WIRE

THE ELECTRICIAN'S
CHAMPION



idealind.com

If it's IDEAL®, it's a quality connector — and the In-Sure® Push-In Wire Connector is no exception. Color-coded, the clear polycarbonate housing allows for visual verification of every connection. The ergonomic design of the In-Sure® is easier to grip which means more comfortable push-in connections. Perfect for lighting installations, pre-fabricated wiring systems, and other branch circuit wiring applications. Simply push the wire in — the low insertion force makes it easy. UL Listed, CSA Certified and rated to 600V and 105°C. In-Sure® saves time and improves productivity while perfecting connections.

**SAVE
TIME
INCREASE
PRODUCTIVITY**


Color-coded for easy identification

Tin-plated copper bus system

Check port for continuity testing

Stainless steel inserts restrict pull-out

Visual verification of connection

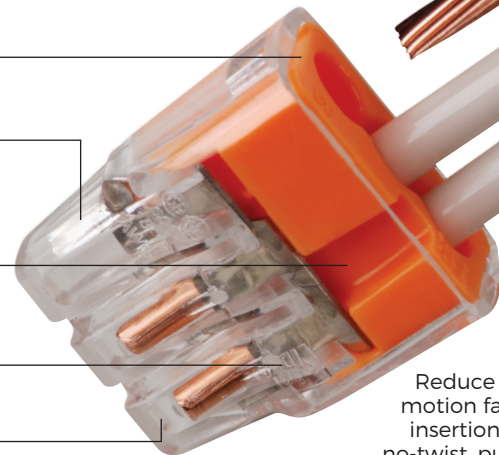

Reduce repetitive motion fatigue – low insertion force and no-twist, push-in design

Ordering Information

Model	Color	Ports	Amp Rating	Wire Range	Quantity	Part No.
32	Red	2	20 Amp		Box of 100	30-1032
					Jar of 300	30-1032J
					Box of 5,000	30-1632
33	Orange	3	20 Amp	Solid Copper (Reusable): 12 - 20 AWG Stranded Copper: 12 - 16 AWG (≤ 19 Stranded) (Non-Reusable) 18 AWG (7 Stranded) Stranded Copper (Tin Bonded): 14 - 18 AWG (≤ 19 Stranded) (Non-Reusable)	Box of 100	30-1033
					Jar of 250	30-1033J
					Box of 5,000	30-1633
34	Yellow	4	20 Amp	DO NOT use with 16 AWG (26 Strands)	Box of 100	30-1034
					Jar of 200	30-1034J
					Box of 5,000	30-1634
87	Gray	5	20 Amp		Jar of 200	30-087J
					Box of 3,000	30-687
88	Blue	6 Stacked	20 Amp	Solid Copper: 12 - 20 AWG Stranded Copper: 14 - 16 AWG (≤ 19 Stranded) 18 AWG (7 Stranded) Stranded Copper (Tin Bonded): 14 - 18 AWG (≤ 19 Stranded)	Jar of 100	30-088J
					Box of 2,500	30-688
90	Black	8	20 Amp		Jar of 100	30-090J
					Box of 2,000	30-690
39	Blue	3	30 Amp	Solid Copper: 10 - 14 AWG (6.2-2.5mm ² Rigid) Solid Copper-Clad Aluminum*: 10 - 12 AWG Stranded Copper: 10 - 12 AWG (≤ 19 Stranded) (Tin Bonded): 10 - 14 AWG (≤ 19 Stranded)	Box of 50	30-1039
					Jar of 150	30-1039J

Cu to Cu ONLY. Do not use on aluminum.

Temperature rating: 105°C (221°F) maximum; 600V maximum building wire, 1000V maximum signs or lighting fixtures

Model 39 only: *Listed for use with CU or CC. Do not use on Aluminum.



IDEAL INDUSTRIES, INC.
1800 S. Prairie Drive, Sycamore, IL 60178, USA / 815-895-5181 • 800-435-0705 in USA

International offices:
Australia • Canada • China • India • Mexico • UK

For complete sales office contact information, visit us at:
idealind.com