


SOLID, STRANDED AND FLEXIBLE WIRES

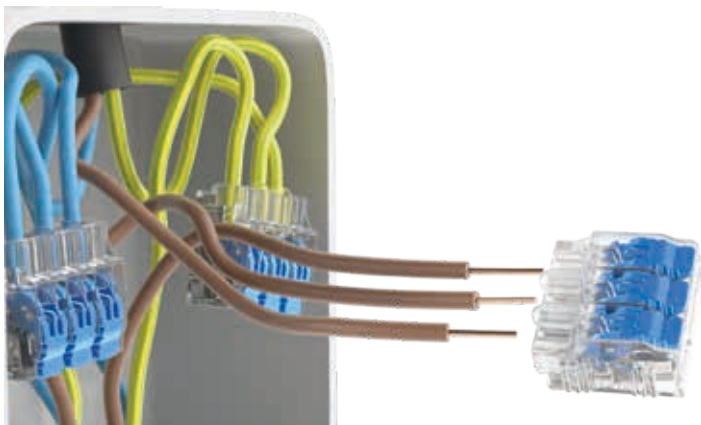

Ordering Information

Description	Quantity	Cat. No.
2 port Gen II lever wire connectors	Bag of 10	30-0092-10
	Bag of 30	30-0092-30
	Box of 40	30-0092
3 port Gen II lever wire connectors	Bag of 10	30-0093-10
	Bag of 30	30-0093-30
	Box of 40	30-0093
5 port Gen II lever wire connectors	Box of 30	30-0095
2, 3 and 5 port Gen II lever wire connectors (10 of each)	Box of 30	30-0099
2, 3 and 5 port Gen II lever wire connectors (10 of each)	Bag of 30	30-0099-B
SpliceLine, 3 port push in and 2 & 3 port Gen II lever wire connectors	Bag of 20	30-0099-MB

WIRE CONNECTOR KITS

The Gen II lever wire connector kits contain a selection of Gen II lever connectors, push-in connectors and SpliceLine connectors.

There is even a kit including our cable stripper for flat cable (Twin & Earth) and Data T[®]-Cutter.




Ordering Information

Description	Quantity	Cat. No.
Twin & Earth Kit for flat cable	1 x Cable Stripper (45-235) 1 x Data T [®] -Cutter (45-074) 20 x SpliceLine [®] 20 x 2 port push in 20 x 3 port push in 20 x 2 port Gen II lever 20 x 3 port Gen II lever	30-5002EU
Push-In & Lever Wire Connector Kit (80 pcs.)	10 x 2 port Gen II lever connector 10 x 3 port Gen II lever connector 5 x 5 port Gen II lever connector 10 x 2 port push in 10 x 3 port push in 10 x 4 port push in 10 x 6 port push in 15 x 2 port SpliceLine [®]	30-5025EU
Push-In & Lever Wire Connector Premium Kit (240 pcs.)	30 x 2 port Gen II lever connector 40 x 3 port Gen II lever connector 20 x 5 port Gen II lever connector 30 x 2 port push in 30 x 3 port push in 20 x 4 port push in 15 x 5 port push in 15 x 6 port push in 10 x 8 port push in 30 x 2 port SpliceLine [®]	30-5026EU



GEN II LEVER WIRE CONNECTORS

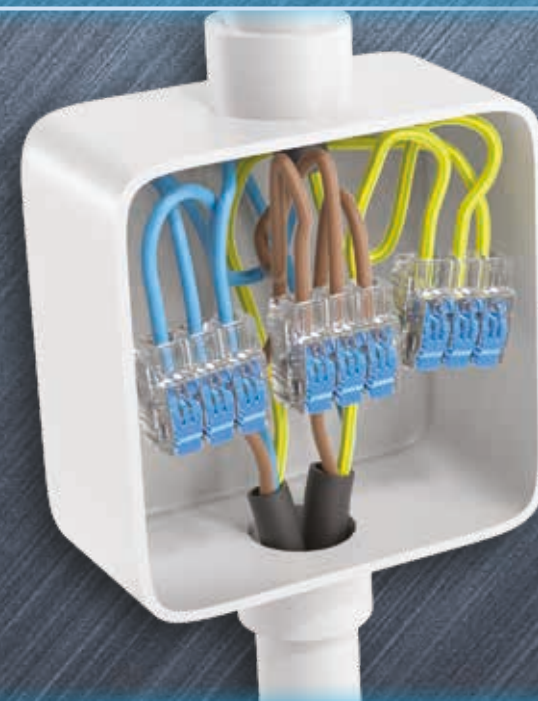

SOLID, STRANDED & FLEXIBLE WIRES

idealind.com



INTRODUCTION

The IDEAL Gen II lever connectors utilise the latest connection technologies and can accommodate multiple wires of different types of sizes.

They offers a fast, simple and cost-effective alternative to terminal strips allowing electrical professionals to save time and money on site while achieving easier, more consistent terminations for wires up to 4mm² (12 AWG) and 32 Amps.



**'Up to 4 mm² -
for a multitude of applications'**

FEATURES & BENEFITS

- **Releasable connector** - for solid, stranded and flexible wires
- **Innovative levers** - opens in the opposite direction of insertion points
- **Compact design** - suits tight spaces
- **Easy to use** - wires can be inserted without lifting the levers
- **Continuity check port** - for testing
- **Clear shell** - allows for verification of connection
- **Maintenance Free** - certified for use with In-Sure® Box
- **Secure your cables in seconds** - no screwdriver, no crimping, just strip, push, connect



Wire clamping range:

- 0.2 mm² to 4.0 mm² (24 - 12 AWG) for solid and rigid stranded wires (≤ 7 strands)
- 0.14 mm² to 4.0 mm² (24 - 12 AWG) for flexible wires

Standards / Compliance:

- BS 7671:2008 (18th Edition), IEC 60998 and UL 486C compliant



APPLICATIONS

For use in all applications up to 32A including lighting, access control, radial and final ring circuits.



SPEED

**'Easy to use -
just strip, push, connect'**

SPECIFICATIONS

SPECIFICATIONS		2 port	3 port	5 port
Rating	IEC 60998	32 Amp / 450V / 85°C (ambient)		
	UL 486C	600V / 105°C (working)		
Depth	18.6 mm			
Width	13.3 mm	18.9 mm	30.4 mm	
Height	8.8 mm			
Wire combination range	Solid and rigid stranded (≤7 str)	0.2mm ² -4.0mm ² /24-12 AWG		
	Flexible wires	0.14mm ² -4.0mm ² /24-12 AWG		

Produced in the EU